
Installation and lamp change instructions for LED-PL2-KIT.

Ensure the mains power is turned off and the product has cooled before working with this fitting.

If you do not feel fully confident when dealing with electrical procedures, seek the advice of a qualified electrician.

Installation:

Position out where you would like to place the plinth lights. Make sure that the cable from the driver reaches
the first light and each light there on can connect to the next.
Cable from the driver to the first light: 1m
Cable between each light: 1.5m

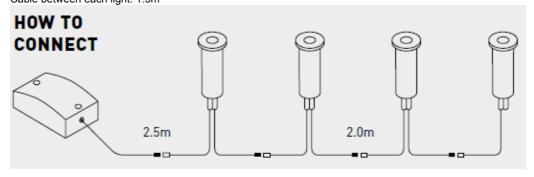

2. Drill a hole 10mm diameter using an appropriate drill bit. The LED head is 28mm in depth.



- 3. Push the fittings into place in the hole. Connect the first light to the plug transformer and link the following lights into each other forming a 'daisy chain'.
- 4. Switch the power on to start using the light fittings.