


Wiring

Having correctly identified the wiring from your existing light fitting, pull the mains wire through the hole and connect to the connection block in the following way.

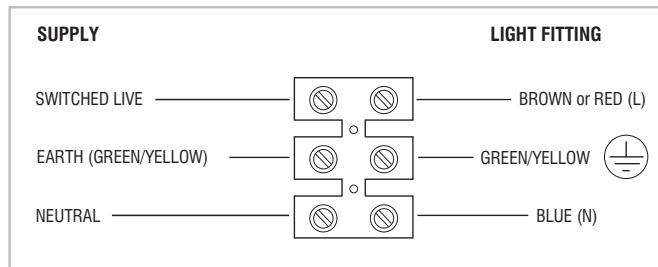

Check that...

You have correctly identified the wires.
The connections are tight.
No loose strands have been left out of the connection block.

Instruction manual

Austen

120816

Technical data

Supply Voltage: 220-240 V~, 50 Hz

Bulb Type: 28W LED (SMD) CCT, 3000/4000/6000K. This product contains a light source of energy efficiency class E.



Non-replaceable light source



Replaceable control gear by a professional



Conformity with all relevant UKCA Directive requirements.



Conformity with all relevant EC Directive requirements.



This is a Class 1 product must be earthed.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.



This product is suitable for dimming.



This product is for indoor use only.

Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.

For your safety, always switch off the power supply before cleaning.

Always disconnect the product from mains at least 10 minutes allowing to cool down before any maintenance or adjustment.

For further information, please visit <https://www.lighting-info.co.uk/120816>

V1 18/07/2025

UK Manufacturer: BH17 7BY

EU Manufacturer: Brilliant AG,
Brilliantstrasse 1, D-27442 Gnarrenburg

saxby
lighting

www.saxbylighting.com

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

 This light fitting is Class 1 product, must be connected to Earth.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with the IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all the parts listed. Please inform your retailer in case of any part shortage.

To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If replacing an existing fitting, make a careful note of the connections.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections

Never put anything on the product or hang anything on any part of this product.

Never use the terminal cables to bear the product weight.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Layout

Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between light fitting.

Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.

This unit is suitable for indoor use only.

The mains supply cable must have a minimum cross section area of 1.0mm².

Cables must be protected using suitable conduit or trunking.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.



Note that the switch is turned off before installation.

Ensure the ceiling is capable of holding the weight of the products. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.

The chosen location of your fitting should allow for the product to be securely mounted and anchored to a solid surface e.g. concrete, brick or a joist—do not fix directly onto paneling, plasterboard etc.

Do not attach to surfaces which are damp, freshly painted or otherwise electrically conductive (e.g. metallic surfaces).

- Unscrew front and back two side screws to remove the fixing bracket and retain the screws for re-use. Use the fixing bracket as a template to mark the screw holes.
- Drill the fitting holes and secure the fixing bracket using the plastic plugs and screws. Ensure the product is level.
- Support your fitting and connect the house wiring to the terminal block and wire as detailed wiring. Any loose terminal blocks-not secured to ceiling cup-should always be covered with 2 layers of good quality insulation tape.
- Secure the ceiling cup over the bracket by using the side screws removed.
- Press the metal buckle and adjust the required length of the suspension kit on both sides up and down until the light is level.
- Turn on the power and test.

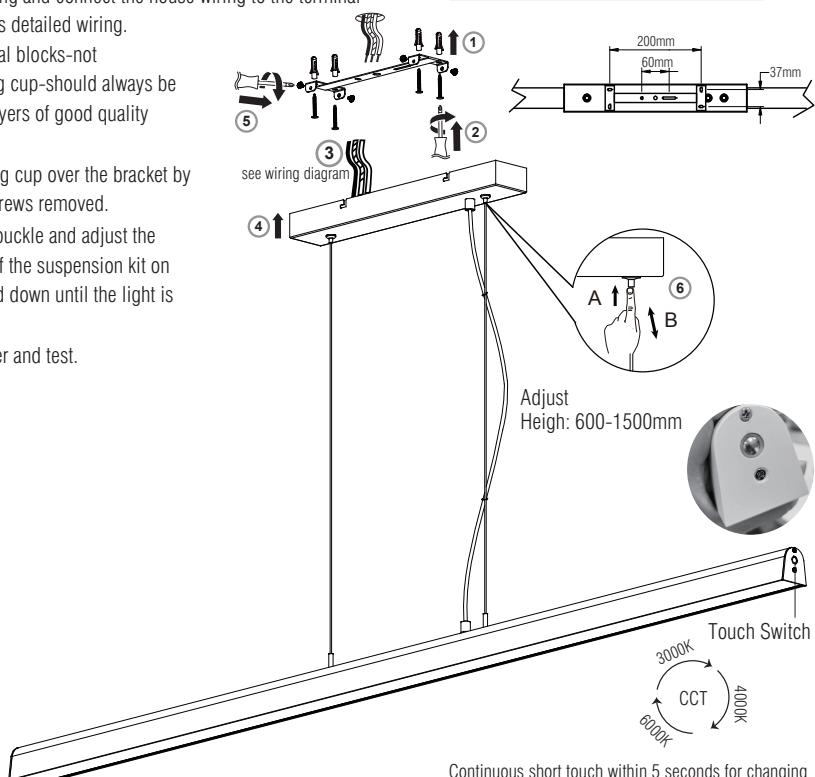

Continuous short touch within 5 seconds for changing the between colour 3000K-4000K-6000K;

Long touch for infinite dimming;

Exceeding 5 seconds no touch, when touch again the lamp will be turned off;

This light is with memory function, when turned on the lamp next time, the previous settings will be maintained.