

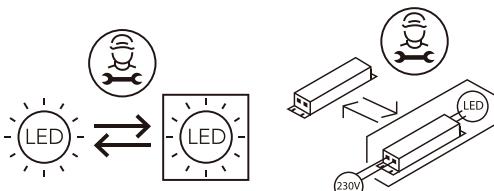
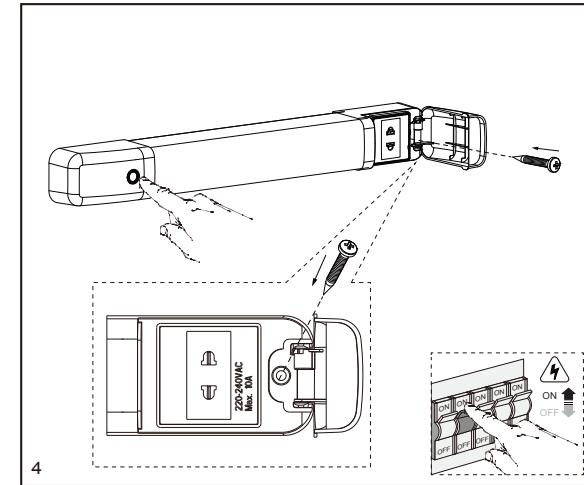
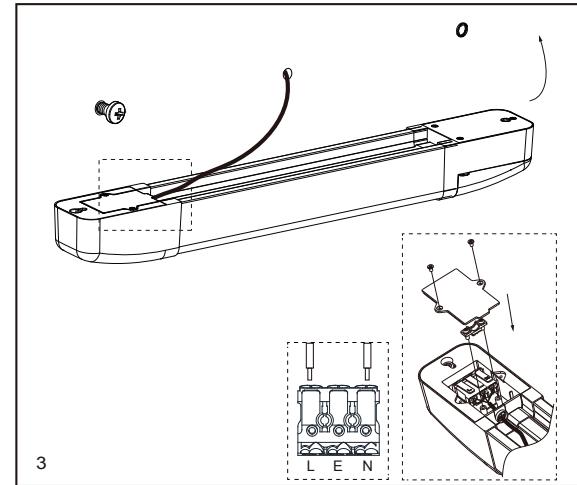


Spa

SPA 45612 - V2

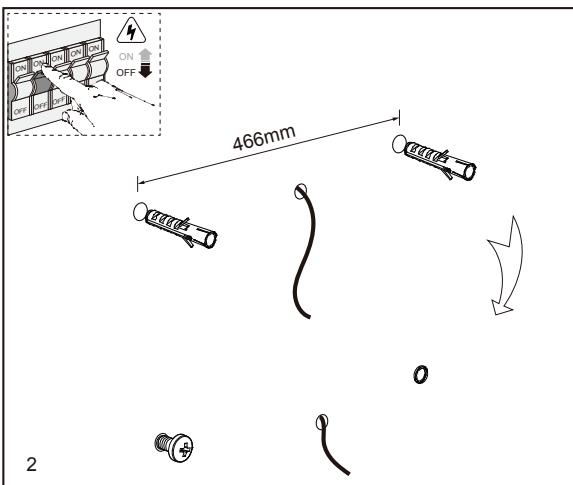

IP44 **UK** **CA** **CE**

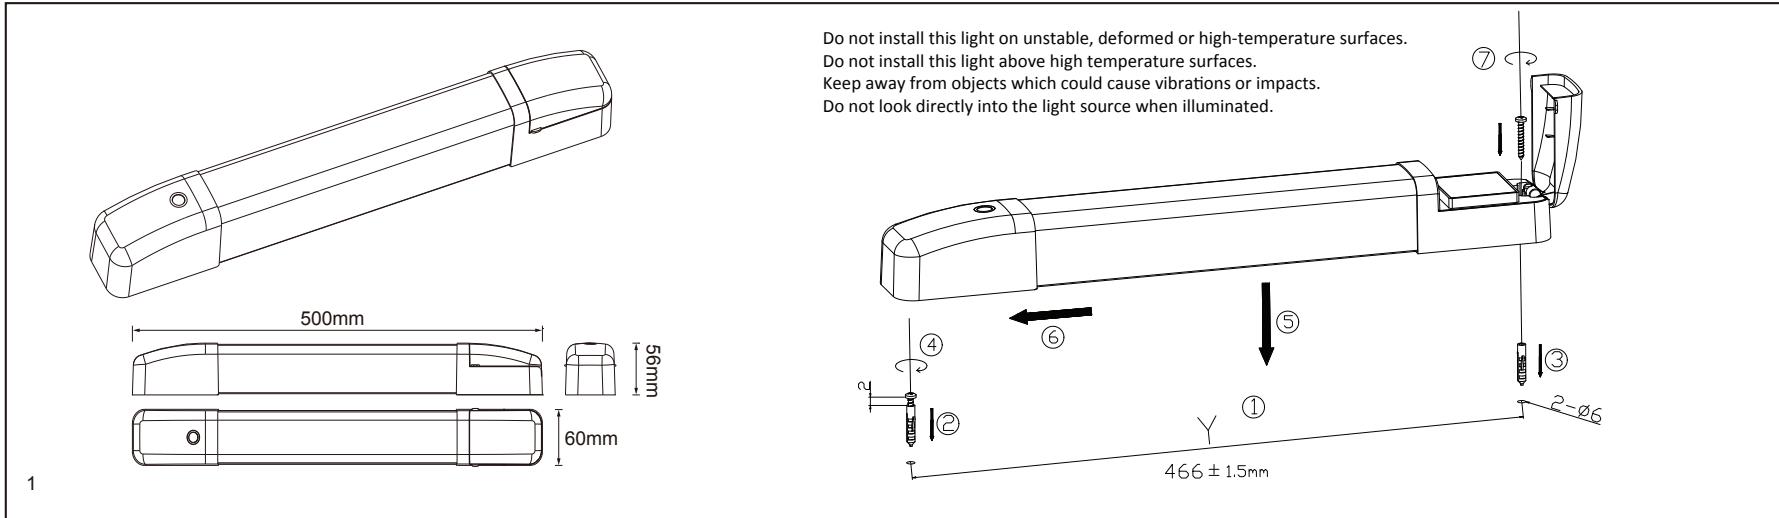

Please take time to read this leaflet carefully and retain it for future reference.

Installation Information:


Quickly double press the switch within 3 seconds to adjust CCT between 3000K→4000K→6500K repeat this cycle.

If the light is on for more than 3 seconds, quickly press the switch to turn the light on/off.


Press and holding the switch dims the light 10%-100% or 100%-10%.

Pressing the touch switch twice turns the green indicator on/off.


Memory function remembers the settings from the last use.



Shaver outlet:

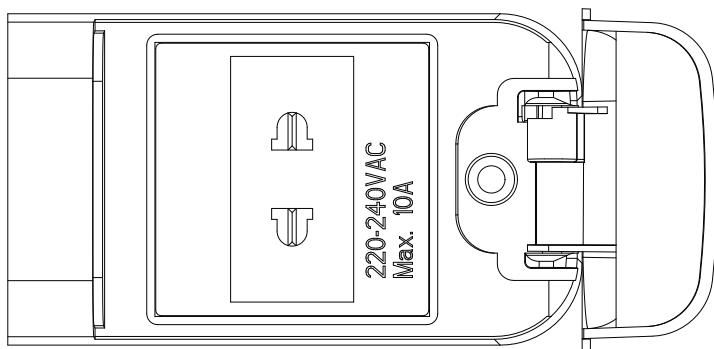

Wiring instruction:

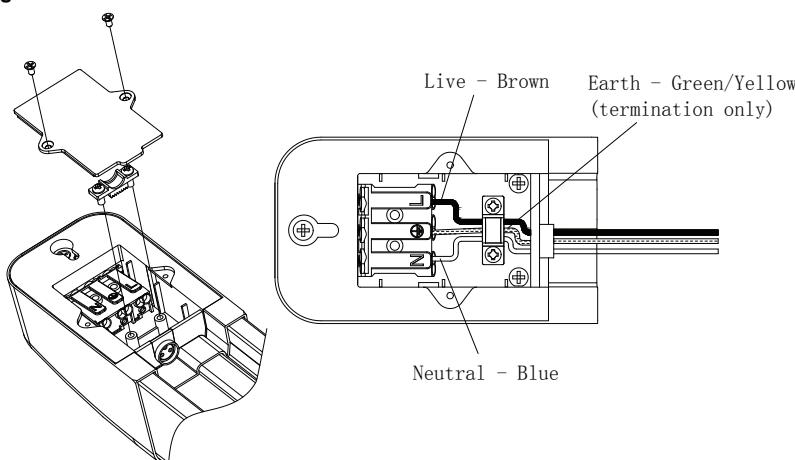

Product Information:

Model: SPA 45612

Product Specifications	
Dimensions (L x W x H mm)	500 x 60 x 56
Material	PC+ ABS
Surface Color	Chrome/White/Black
Light Source	SMD 2835 LED,CRI≥80,SDCM<6
Rated Temperature	25°C - Indoors
Operating Temperature	-20°C to 45°C - Indoors
Protection Class	II
IP Class	IP44
Lifespan	30000H
Insulation	Wall Mounted
Installation Accessories	Wall plugs(2pcs)、Screws(2pcs)
Technical - Electrical Data	
Rated Wattage(W)	10
Rated Luminous Efficacy (lm/W)	100
Rated Luminous Flux(lm)	1000
Input Voltage (Vac)	230
Input Frequency Range (Hz)	50
Led quantity(pcs)	30+30
Color Temp(k)	CCT: 3000-4000-6500

*Note: The data listed above is based on CCT of 3000K and Surface Color 'White'