

SWITCH ON!

You may now switch the electricity back on at the mains.

CLEANING CARE

The fitting should be cleaned with a soft, dry cloth only. Do not use polishes or abrasive cloths.

SAFETY INFORMATION

For your safety, please remember the following:

Always switch off the supply before removing shades/covers, changing light bulbs or cleaning.



This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)

HELPLINE

If you receive this item with parts broken or missing, please telephone:

0333 0050077

Please have ready your name, address, tel. no., product reference, where purchased and parts required. An answering service is in operation outside office hours and during busy periods. We regret that we are unable to give advice on internal house wiring.

Inlight, Gorse Mill, Gorse Street, Oldham, OL9 9RJ

www.cascadehi.com/#contact



EU AUTHORISED REPRESENTATIVE:
AUTHORISED REP COMPLIANCE
GROUND FLOOR
71 LOWER BAGGOT STREET
DUBLIN
IRELAND
D02 P593

www.authorisedrepcompliance.com



INLIGHT

Joshua 3 Light Spotlight Plate INL 44525 User Instructions

Please take time to read this leaflet carefully and retain it for future reference.

GENERAL INFORMATION

We strongly recommend that ceiling lights are installed by a qualified electrician. If, however, you decide to carry out your own installation, please read through these instructions carefully before commencing work, and retain them for future reference.

Please note: The important safeguards and instructions appearing in this leaflet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care are factors which cannot be built into any product and must be supplied by the person installing and caring for the fitting.

Do not mount ceiling/wall fittings onto damp surfaces, such as newly painted or plastered areas, as this may cause discolouration of the finish.

SAFETY AND CARE ADVICE

For your safety, this product must be installed in accordance with local building regulations. If in any doubt, or where required by law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or from your local authority.

This product has been designed for non-professional, domestic use only.

Dispose of all packaging components correctly and responsibly and in accordance with all local laws and regulations. Never leave packaging components within reach of children, as they can be a source of danger.

Before inserting or replacing a bulb, ensure the power is switched off and the bulb has cooled down.

Do not modify any product before or after installation. This may render the product unsafe.

This is a Class 1 product and does require an earth connection.

This fitting must be permanently wired to the electric system.

Always shut off the power to the circuit before starting installation.

All ceiling fittings should be connected via a 5 amp fused circuit and must be installed in accordance with current applicable building and electrical installation regulations.

Before installation and servicing, disconnect the electrical supply at the mains.

Carefully observe all instructions or warnings that are labelled on, or supplied with, your product.

Unless otherwise stated, products are suitable for normal indoor use only and should not be used where water or high humidity may affect them. If in any doubt, consult a qualified electrician.

PARTS LIST

Spotlight x 1
Mounting screws x 2
Wall plugs x 2
Suction Cup x 1


FIXING INSTRUCTIONS

This fitting must be connected to the supply earth. If your lighting circuit does not have an earth, ask a qualified electrician to provide an earth facility. Make sure that there is a joist or other solid mounting at the point of fixing. This is necessary to take the weight of the fitting.


For earthed items (Class 1): These are marked with the symbol 

ASSEMBLY

Step 1 Taking care not to damage any house wiring, detach the mounting strap from the fitting and affix to the ceiling using the screws supplied. These screws should penetrate the joist by at least 2cm.

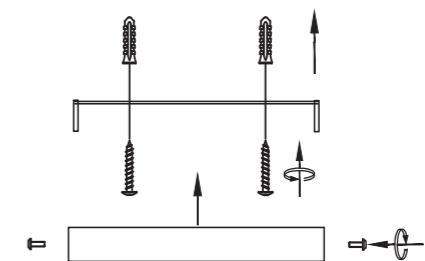

Step 2 Using the connector block supplied, connect the wires as shown on the diagram below. Check that you have correctly identified the house wires, that all connections are tight and that no loose strands have been left out of the connection blocks.

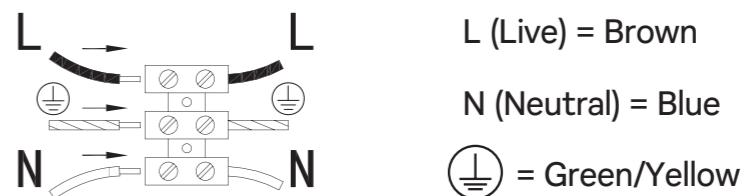

Step 3 Offer the ceiling cup up to the mounting strap and secure in place using the screws/washers.

Step 4 Identify the correct maximum wattage and type of bulb by referring to the product labelling. This product requires 3 x 7W max. GU10 LED reflector bulbs (bulbs not included).

A suction cup has been provided to assist with bulb fitting/removal.

Caution: Only use a bulb of the same type designation and shape, and of the same or lower Wattage. Allow the lamp to cool for at least 10 minutes before replacing spent bulbs..

